

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number
WO 2004/114717 A2

(51) International Patent Classification⁷: **H04R 1/00**

SFX Technologies Limited, SFX House, 6 Pitreavie Court,
Pitreavie Business Park, Dunfermline KY11 8UU (GB).

(21) International Application Number:

PCT/GB2004/002588

(74) Agent: **KENNEDYS PATENT AGENCY LIMITED**;
Queens House, Floor 5, 29 St. Vincent Place, Glasgow G1
2DT (GB).

(22) International Filing Date: 17 June 2004 (17.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

0314007.6

17 June 2003 (17.06.2003) GB

(71) Applicant (for all designated States except US): **SFX
TECHNOLOGIES LIMITED** [GB/GB]; SFX House,
6 Pitreavie Court, Pitreavie Business Park, Dunfermline
KY11 8UU (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): **HYND, Ian**
[GB/GB]; SFX Technologies Limited, SFX House, 6
Pitreavie Court, Pitreavie Business Park, Dunfermline
KY11 8UU (GB). **MUNOZ FRIGOLA, Jordi** [ES/GB];

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: IMPROVEMENTS TO LOUDSPEAKER DRIVER ASSEMBLIES

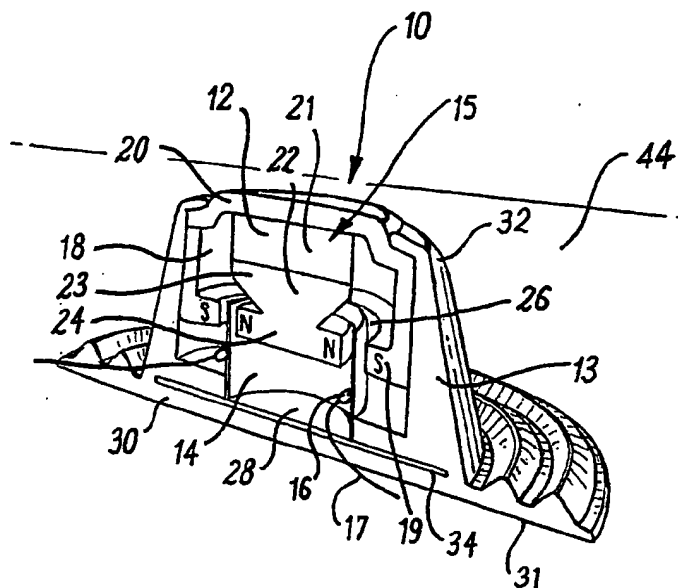

(57) Abstract: An improved driver assembly for a panel loudspeaker includes a retaining element for locating the voice coil with respect to the magnet assembly and forming a surface for removable attachment of the driving assembly to a radiating member. In a preferred embodiment, the retaining element is injection moulded from a hydrogel material with Shore A hardness in the range 0 to 20.

WO 2004/114717 A2



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*